



imageRUNNER C1530 Series

STATE OF THE ART TECHNOLOGY FOR THE MODERN HYBRID OFFICE

Designed for businesses supporting hybrid working, with seamless user experience across fleet devices and easy integration into print environment and IT systems.



PRODUCTIVITY



USER EXPERIENCE



**CLOUD
CONNECTIVITY**



SECURITY



**CONTROL AND
MAINTENANCE**



SUSTAINABILITY

Canon

imageRUNNER C1530 Series



PRODUCTIVITY

- Rapidly digitise paper documents with fast one-pass double-sided scanning.
- Increase efficiency with automated processes and intuitive scan, store and search workflows.
- Native Microsoft Universal Print support allows effortlessly printing from the cloud.
- Create text searchable documents by converting paper originals to electronic data with OOXML – Send function.
- Cater to busy offices with a wide range of paper media, including A6 media support.



USER EXPERIENCE

- The large 7-inch/17.8 cm colour touchscreen has smartphone-like functionality for easy operation.
- Speed up daily tasks by personalising display options for multiple users.
- Minimise physical device interaction with one-touch controls.
- Timeline saves the last 9 operations so you can quickly repeat frequently used jobs.
- Improved visual messaging makes functions clearer and easier to use.



CLOUD CONNECTIVITY

- Simplify print management and reduce costs with full uniFLOW compatibility.
- The single integrated cloud solution provides intelligent auditing, budgeting and reporting.
- Print from anywhere, with an iOS direct connection thanks to mobile devices connectivity.



SECURITY

- Embedded McAfee Protected guards against advanced threats and data loss by blocking unauthorized applications.
- TLS 1.3 support ensures compliance and privacy regulations with enhanced security protocol and strong data encryption.
- SIEM (Security Information and Event Management) supports real-time threat detection and security incident response.
- Dual network – wired/wired – helps prevent unauthorised access to secured or personal networks as well offering a stable connection, wherever the device location.
- Protect document and data confidentiality with Secure Print and Encrypted PDF functions.



CONTROL AND MAINTENANCE

- Centrally manage print settings and device usage analysis through uniFLOW print management solutions.
- Maximise device uptime and optimise consumables with remote diagnostics, automated meter readings and consumables monitoring from e-Maintenance.
- The Content Delivery System automatically delivers firmware updates for continued security.
- Access system functions on the device remotely with the Remote Operators Software Kit.
- Easily manage, monitor and control multiple networked printers with IWEMC.



SUSTAINABILITY

- Minimise paper and toner wastage by editing print settings at device with Forced Hold Print.
- Reduce running costs with low energy consumption.
- Further minimise paper usage with automated and digitised processes from cloud collaboration.

QUICK FACTS

imageRUNNER C1538iF

- Print, Copy, Scan, Send and Fax
- 7-inch/17.8cm LCD colour touchscreen
- Print Speed: 38ppm (A4)
- Print resolution: Up to 1,200 x 1,200 dpi
- Scan speed: Up to 150ipm with One Pass Scan
- Mobile and cloud printing: AirPrint, Mopria, Canon PRINT Business and uniFLOW Online
- Dual Network, Wi-Fi, USB and QR Code connectivity
- Max paper input capacity: 2,300 sheets

imageRUNNER C1533iF

- Print, Copy, Scan, Send and Fax
- 7-inch/17.8cm LCD colour touchscreen
- Print Speed: 33ppm (A4)
- Print resolution: Up to 1,200 x 1,200 dpi
- Scan speed: Up to 150ipm with One Pass Scan
- Mobile and cloud printing: AirPrint, Mopria, Canon PRINT Business and uniFLOW Online
- Dual Network, Wi-Fi, USB and QR Code connectivity
- Max paper input capacity: 2,300 sheets

SERVICES

CORE

Perform routine office operations safely and with ease, utilising embedded software including uniFLOW, Microsoft Universal Print and other available services offering complete device maintenance and support



HARDWARE



SOFTWARE



SERVICES

BESPOKE

Choose a tailored service to suit your business needs by removing unnecessary print management burdens. Consult with Canon experts about your specific requirements to find a fitting Print Managed Services option

ENHANCED

Expand cloud capabilities with uniFLOW, Canon's all-in-one print management system



Canon Inc.
canon.com


Canon Europe
canon-europe.com

English edition
© Canon Europa N.V., 2021

imageRUNNER C1530 Series

FAST AND SECURE COLOUR A4 DEVICES FOR ALL YOUR PRINTING AND SCANNING NEEDS

MAIN CONFIGURATION OPTIONS

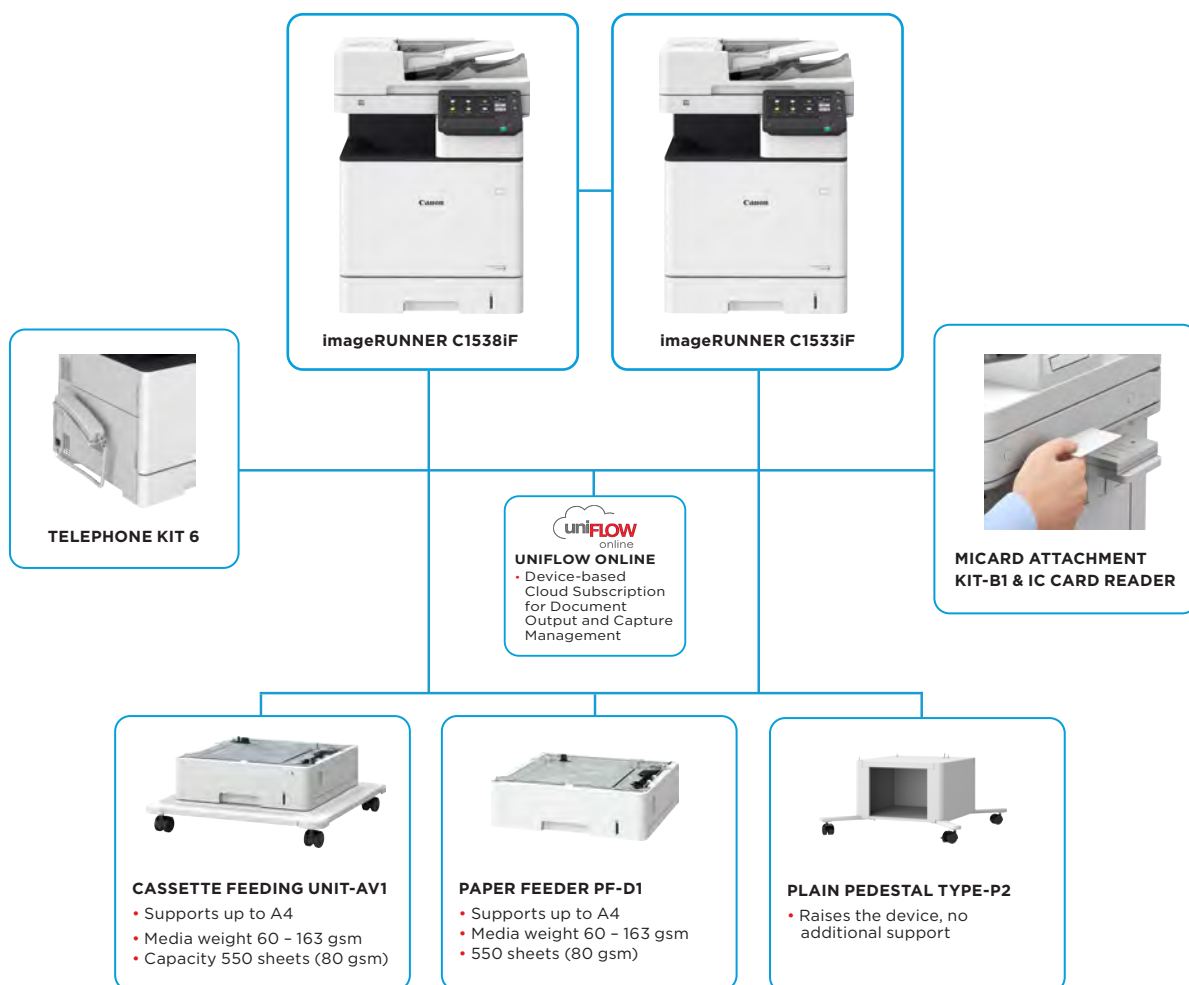

This flat configuration is for illustration purpose only. For a complete list of options and the exact compatibility relationships, please refer to the [online product configurator](#)

TECHNICAL SPECIFICATIONS

imageRUNNER C1530 Series

MAIN UNIT

Machine type	A4 Colour Laser Multifunctional
Core functions	Print, Copy, Scan, Send and Fax
Processor	1GHz Dual Core Processor
Control Panel	17.8 cm/7 inch TFT LCD WVGA Colour Touch panel
Memory	Standard: 2.0GB RAM
Storage	Standard: 64GB eMMC (available space 30GB)
Interface Connection	NETWORK Standard: 1000Base-T/100Base-TX/10Base-T, Wireless LAN (IEEE 802.11 b/g/n) OTHERS Standard: USB 2.0 (Host) x2, USB 2.0 (Device) x1
Paper Supply Capacity (A4, 80gsm)	Standard: 650 sheets Maximum: 2300 sheets (with Cassette Feeding Unit-AV1 + Paper Feeder PF-D1 x 2)
Paper output capacity (A4, 80gsm)	Standard: 200 sheets Maximum: 200 sheets
Finishing Capabilities	Collate, Group
Supported Media Types	Multi-purpose Tray: Thin, Plain, Recycled, Colour, Heavy, Bond, Transparency, Label, Pre-punched, Envelope Paper Cassette: Plain, Recycled, Colour, Pre-punched
Supported Media Sizes	Multi-purpose tray: Standard size: A4R, A5, A5R, A6R, B5R, Envelopes [No. 10(COM 10), Monarch, ISO-C5, DL] Custom Size/Free Size: Min.76.2 x127.0 mm up to 216.0 x355.6 mm Paper Cassette: Standard size: A4R, A5, A5R, A6R, B5R
Supported Media Weights	Multi-purpose tray: 60 to 216 gsm Paper Cassettes: 60 to 163 gsm Duplex: 60 to 163 gsm
Warm-up Time	4 Seconds or Less* * Time from device power-on to when key operations can be performed on the touch panel display. From Sleep Mode: 10 seconds or less 12 Seconds or Less* *Time from device power on, until copy ready (not print reservation)
Dimensions (W x D x H)	500 x 556 x 640 mm
Installation Space (W x D)	717 x 785 mm (with Multipurpose Tray extended and Cassette door open)
Weight	Approx. 41.0 kg including toner

PRINT SPECIFICATIONS

Print Speed (BW/CL)	iR C1538iF: Up to 38/38 ppm (A4R) Up to 40/40 ppm (A5R), Up to 59/59 ppm (A5) iR C1533iF: Up to 33/33 ppm (A4R) Up to 40/40 ppm (A5R), Up to 55/55 ppm (A5)
Print Resolution (dpi)	Up to 1,200 x 1,200
Page description languages	Standard: UFR II, PCL6, Adobe® PostScript®3™
Direct Print	Supported file types: RUI: PDF, EPS, TIFF/JPEG, XPS USB Memory: PDF, TIFF/JPEG, XPS Network Place: PDF, TIFF/JPEG, XPS AirPrint, Mopria, Universal Print by Microsoft
Printing from mobile and cloud	AirPrint, Mopria, Canon PRINT Business and uniFLOW Online A range of software solutions is available to provide printing from mobile devices and cloud-based services depending on your requirements. Please contact your sales representative for further information
Fonts	PS fonts: 136 Roman PCL fonts: 93 Roman, 10 Bitmap fonts, 2 OCR fonts, Andalé Mono WT J/K/S/T*1 (Japanese, Korean, Simplified and Traditional Chinese), Barcode fonts*2 *1 Requires optional PCL International Font Set-A1 *2 Requires optional Barcode Printing Kit-D1
Print Features	Secure Print, Watermark, Header/Footer, Page Layout, Two-sided Printing, Mixed Paper Sizes/ Orientations, Toner Reduction, Poster Printing, Forced Hold Printing, Print Date, Scheduled Printing, Printing Using a Virtual Printer

Operating System

UFR II: Windows® 8.1/10/Server 2012/Server 2012 R2/Server 2016/Server 2019, MAC OS X (10.11 or later)
PCL: Windows® 8.1/10/Server 2012/Server 2012 R2/Server 2016/Server 2019
PS: Windows® 8.1/10/Server 2012/Server 2012 R2/Server 2016/Server 2019, MAC OS X (10.10 or later)
PPD: Windows® 8.1/10, MAC OS X (10.10 or later)
As of January, 2021

COPY SPECIFICATIONS

Copy Speed (BW/CL)	iR C1538iF: Up to 38/38 ppm (A4R) Up to 40/40 ppm (A5R), Up to 59/59 ppm (A5) iR C1533iF: Up to 33/33 ppm (A4R) Up to 40/40 ppm (A5R), Up to 55/55 ppm (A5)
First-Copy-Out Time (A4, BW/CL)	Approx. 5.9/6.9 seconds or less
Copy resolution (dpi)	600 x 600
Multiple Copies	Up to 999 copies
Copy Density	Automatic or Manual (9 Levels)
Magnification	25% to 400% (1% Increments) Preset reduction/enlargement: 25%, 50%, 70%, 100%, 141%, 200%, 400%
Copy Features	Preset R/E Ratios by Area, Two-Sided, Density Adjustment, Original Type Selection, Interrupt Mode, Two-sided Original, Sort, Job Build, N on 1, Sharpness, Erase Frame, Copy ID Card, Skip Blank Pages, Colour Mode, Reserved copy, Copy Sample

SCAN SPECIFICATIONS

Type	Standard: Single-pass Duplexing Automatic Document Feeder (2-sided to 2-sided)
Document Feeder Paper Capacity (80 gsm)	up to 100 sheets
Acceptable Originals and weights	Platen: Sheet, Book Document Feeder media weight : 1-sided scanning: 42 to 128 gsm (BW), 64 to 128 gsm (CL) 2-sided scanning: 50 to 128 gsm (BW), 64 to 128 gsm (CL)
Supported media sizes	Platen: max. scanning size: 216.0 x 355.6 mm Document Feeder media size: A4R, A5R, A6R, B5R Custom size: 48.0 x128.0 mm to 216.0 x 355.6 mm
Scan Speed (ipm: BW/CL, A4)	DADF: 1-sided Scanning: 95/95 (300 dpi, send), 50/50 (600 dpi, copy) 2-sided Scanning: 150/145 (300 dpi, send), 50/50 (600 dpi, copy)
Scan Resolution (dpi)	Scan for Copy: up to 600 x 600 Scan for Send: (Push,BW) up to 600 x 600, (Pull,BW) up to 600 x 600 (Push,CL) up to 300 x 300, (Pull,CL) up to 300 x 300 Scan for Fax: up to 600 x 600
Pull Scan Specifications	Colour Network ScanGear2. For both TWAIN and WIA Supported OS: Windows®7/8.1/10/Server2008/Server2008 R2/Server2012/Server2012 R2/Server 2016/Server 2019
Scan Method	PushScan, PullScan, Scan to Network, Scan to USB Memory Key, Scan to Mobile device, Scan to cloud (uniFLOW Online/Online Express)

TECHNICAL SPECIFICATIONS

imageRUNNER C1530 Series

SEND SPECIFICATIONS

Destination	Standard: E-mail/Internet FAX (SMTP), Super G3 FAX, SMB3.0, FTP, WebDAV
Address Book	LDAP (2,000)/Local (1,600)/Speed dial (200)
Send resolution (dpi)	Push: 100 x 100, 150 x 150, 200 x 100 (Normal), 200 x 200 (Fine), 200 x 400* (SuperFine), 300 x 300, 400 x 400* (UltraFine), 600 x 600* Pull: 75 x 75, 100 x 100, 150 x 150, 200 x 200, 300 x 300, 400 x 400*, 600 x 600* *Colour mode is black and white only
Communication protocol	File: FTP (TCP/IP), SMB3.0 (TCP/IP), WebDAV Email/iFax: SMTP (send), POP3 (receive)
File Format	Standard: TIFF (MMR), JPEG*, PDF (Compact, Searchable, PDF/A-1b, Encrypted), XPS (Compact, Searchable), PDF/XPS (Device Signature, Office Open XML (PowerPoint, Word)) Optional: PDF (Trace & Smooth), PDF/XPS (User Signature) *Single page only
Universal Send Features	Original Type Selection, Two-sided Original, Density Adjustment, Sharpness, Erase Frame, Job Build, Delayed Send, Preview, Job Done Notice, File Name, Subject/Message, Reply-to, E-mail Priority, TX Report, Original Content Orientation

FAX SPECIFICATIONS

Maximum Number of Connection Lines	1
Modem Speed	Super G3: 33.6 kbps G3: 14.4 kbps
Compression Method	MH, MR, MMR, JBIG
Resolution (dpi)	400 x 400 (Ultrafine), 200 x 400 (Superfine), 200 x 200 (Fine), 200 x 100 (Normal)
Sending/Recording Size	Sending: A4, A5*1, A6*1, B5*1 Receiving: A4, A5, B5 *1 Sent as A4
FAX memory	Up to 30,000 pages
Speed dials	Max. 200
Group dials/destinations	Max. 199 dials
Sequential broadcast	Max. 256 addresses
Memory backup	Yes
Fax Features	Sender's Name (TTI), Direct Send, Delayed Send, Preview, Job Done Notice, TX Report, Interrupt Transmission, Sequential Broadcasting, Password/Subaddress Sending, Confidential Mailbox

STORE SPECIFICATION

Memory Media	Standard: USB Memory
---------------------	----------------------

SECURITY SPECIFICATIONS

Authentication and Access Control	User Authentication (Picture Login, Picture and PIN Login, Username and Password Login, Function Level Login, Mobile Login), Department ID Authentication (Department ID and PIN Login, Function Level Login), uniFLOW Online Express (PIN Login, Picture Login, Picture and PIN Login, Card Login, Card and PIN Login, Username and Password Login, Department ID and PIN Login, Function Level Login), Access Management System (Access Control)
--	--

Document Security	Print Security (Secure Print, Encrypted SecurePrint, Forced Hold Printing, uniFLOW Secure Print*1), Recieve Data Security (Confidential Fax Inbox Forwarding Received Documents Automatically), Scan Security (Encrypted PDF, Device Signature PDF/XPS, User Signature PDF/XPS*2), Send Data Security (Setting for requesting password input per transmission, Restricted E-mail/File send functions, Confirming FAX number, Allow/Restrict Fax Driver Transmissions, Allow/Restrict Sending from History, S/MIME Support),
--------------------------	---

*1 Requires optional uniFLOW Online / uniFLOW
*2 Requires optional Universal Send Digital User Signature Kit-C1

Network Security

TLS 1.3, IPsec, IEEE802.1X authentication, SNMP V3.0, Firewall Functionality (IP/MAC Address Filtering), Dual Network Support (Wired LAN/Wireless LAN, Wired LAN/Wired LAN), Disabling/Enabling (Network Protocols/Applications, Remote UI, USB Interface), G3 FAX separation from LAN, USB Port separation from LAN, Scan and Send -Virus Concerns for E-mail Reception

Device Security

Standard Storage Initialize, Job Log Conceal Function, Protecting MFP Software Integrity, Verify System at Startup, Runtime Intrusion Detection

Device Management and Auditing

Administrator Password, Digital Certificate and Key Management, Audit Log, Cooperating with External Security Audit System (Security Information and Event Management), Security Policy Setting

ENVIRONMENTAL SPECIFICATIONS

Operating Environment

Temperature: 10 to 30 °C
Humidity: 20 to 80% RH (Relative Humidity)

Power source

iR C1538iF: 220-240V 50/60Hz 4.0A
iR C1533iF: 220-240V 50/60Hz 3.9A

Power consumption

Maximum: Approx. 1,500 W

Standby: Approx. 33.3 W*1

Sleep mode: Approx. 1.1 W*2

*1 Reference value: measured one unit

*2 Sleep mode is not available in all circumstances due to certain settings.

Typical Electricity Consumption (TEC)* :

iR C1538iF : 0.43 kWh

iR C1533iF : 0.40 kWh

*As per US ENERGY STAR version 3.0

Sound Power Level (LWA,m)
Active (1-sided): 6.1B*1, Kv 0.3B*1

*1 Reference value: measured only one unit with ISO7779, described with ISO9296:2017

Sound Pressure Level (LpAm)

Bystander's position:

Active (1-sided): 50 dB*1

*1 Reference value: measured only one unit with ISO7779, described with ISO9296:2017

Noise levels (BW/CL)

Standards

Blue Angel (applied for)

CONSUMABLES

Toner Cartridge/s

T10 TONER BK/C/M/Y
T10L TONER BK/C/M/Y

Toner Yield (Estimated @ 5% Coverage)

T10 TONER BK: 13,000 pages
T10 TONER C/M/Y: 10,000 pages
T10L TONER BK: 6,000 pages
T10L TONER C/M/Y: 5,000 pages

SOFTWARE AND PRINTER MANAGEMENT

Tracking and reporting

uniFLOW Online Express

Remote management tools

iW Enterprise Management Console
eMaintenance
Content Delivery System

Scanning software

Network ScanGear

TECHNICAL SPECIFICATIONS

imageRUNNER C1530 Series

PAPER SUPPLY OPTIONS

CASSETTE FEEDING UNIT-AV1

Paper Capacity: 550 sheets (80 gsm)
Paper Type: Thin, Plain, Heavy, Recycled, Colour, Pre-punched, Bond, Labels
Paper Size: A4R, A5, A5R, A6R, B5R
Custom Size: 101.6 × 148.0 mm to 216.0 × 355.6 mm
Paper Weight: 60 to 163 gsm
Dimensions (W x D x H): 597 x 635 x 225 mm
Weight: Approx. 15.5 kg

Paper Feeder PF-D1

Paper Capacity: 550 sheets (80 gsm)
Paper Type: Thin, Plain, Heavy, Recycled, Colour, Pre-punched, Bond, Labels
Paper Size: A4R, A5, A5R, A6R, B5R
Custom Size: 101.6 × 148.0 mm to 216.0 × 355.6 mm
Paper Weight: 60 to 163 gsm
Dimensions (W x D x H): 458 x 464 x 130 mm
Weight: Approx. 6.1 kg

HARDWARE ACCESSORIES

CARD READERS

Copy Card Reader Attachment-J1
Copy Card Reader-F1

OTHERS

MiCARD Attachment Kit-B1

SYSTEM AND CONTROLLER OPTIONS

PRINT ACCESSORIES

PCL International Font Set-A1.

SEND OPTIONS

Universal Send Trace & Smooth PDF Kit-A1
Universal Send Digital User Signature Kit-C1

Barcode Printing

Barcode Printing Kit-D1

System Accessories

Copy Control Interface Kit-C1

OTHER OPTIONS

ACCESSIBILITY

ADF Access Handle-A1

ACCESSORIES

TELEPHONE 6 KIT Long cord Cool White

Software & Solutions



Compatibility



Canon

Canon Inc.
canon.com

Canon Europe
canon-europe.com

English edition

© Canon Europa N.V., 2021