




Canon uniFLOW Online  
Outstanding Cloud Output Management Solution



# FAST A4 COLOUR PRINTING FOR OPTIMISED OFFICE PRODUCTIVITY

## MAIN CONFIGURATION OPTIONS

Choice of paper supply options\*

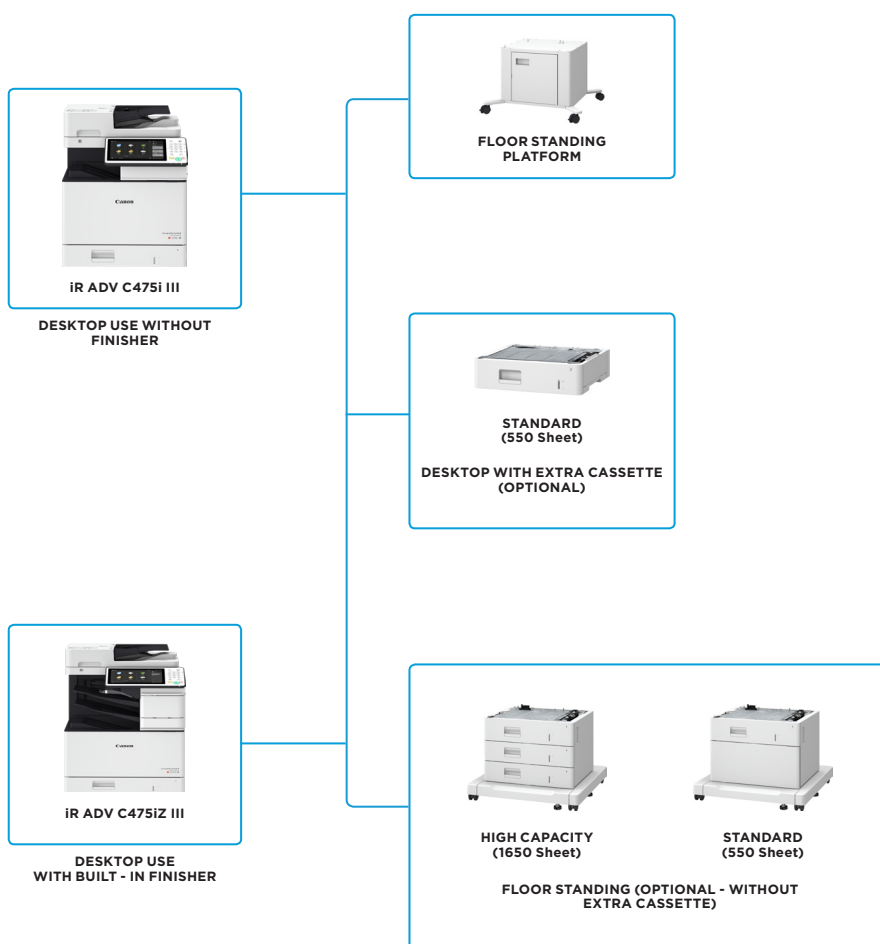

\* Paper supply options include up to two additional cassettes for non finisher and finisher models.

This flat configuration is for illustration purpose only. For a complete list of options and the exact compatibility relationships, please refer to the online product configurator.

# TECHNICAL SPECIFICATIONS

# imageRUNNER ADVANCE C475i III series

<b>MAIN UNIT</b>		<b>COPY SPECIFICATIONS</b>	
<b>Machine type</b>	A4 Colour Laser Multifunctional	<b>Copy Speed*</b> (ppm; BW and CL) * Simplex	iR-ADV C475i III / C475iZ III up to 47 (A4), up to 73 (A5), up to 39 (A5R), up to 49 (A6)
<b>Core functions</b>	Print, Copy, Scan, Send, Store and Optional Fax	<b>First-Copy-Out Time</b> (A4; BW/ CL)	Approx. 5.1 / 5.8 seconds or less
<b>Processor</b>	Canon Dual Custom Processor (Shared)	<b>Copy</b>	600 x 600
<b>Control Panel</b>	25.6 cm (10.1 inch) TFT LCD WSVGA Colour Touch panel	<b>Multiple Copies</b>	Up to 9,999 copies
<b>Memory</b>	Standard: 4.0GB RAM	<b>Copy Density</b>	Automatic or Manual (9 Levels)
<b>Hard Disk drive</b>	Standard: 250GB	<b>Magnification</b>	25% - 400% (1% Increments)
<b>Interface Connection</b>	NETWORK Standard: 1000Base-T/100Base-TX/10Base-T, Wireless LAN (IEEE 802.11 b/g/n); Optional: NFC, Bluetooth Low Energy OTHERS Standard: USB 2.0 (Host) x1, USB 3.0 (Host) x1, USB 2.0 (Device) x1; Optional: Copy Control Interface	<b>Preset Reductions</b>	25%, 50%, 70 %
		<b>Preset Enlargements</b>	141%, 200%, 400%
		<b>Basic Copy Features</b>	Preset R/E Ratios by Area, Paper Setting, Previous Setting, Favourite Setting, Finishing, Two-Sided, Density Adjustment, Original Type Selection, Interrupt Mode, Setting Confirmation/Cancel
<b>Paper Supply Capacity (A4, 80 gsm)</b>	Standard: 590 sheets Paper Cassette: 500-sheet cassette, 90-sheet Multi-purpose tray Maximum: 2,090 sheets* (with Cassette Feeding Unit-ATT)	<b>Special Copy Features</b>	Two-sided Original, Finishing, Job Build, N on 1, Density Adjustment, Original Type Selection, Page Numbering, Copy Set Numbering, Sharpness, Erase Frame, Secure Watermark, Print Date, Shift, Job Done Notice, Copy ID Card, Skip Blank Pages, Detect Feeder Multi Sheet Feed, Adjust One-Touch Colour, Colour Balance
<b>Paper output capacity (A4, 80 gsm)</b>	Standard model (iR-ADV C475i III): 400 sheets Finisher model (iR-ADV C475iZ III): 900 sheets*		
<b>Finishing capabilities</b>	Standard model: Collate, Group Finisher Model: Collate, Group, Offset, Staple	<b>SCAN SPECIFICATIONS</b>	
<b>Supported media types</b>	Multi-purpose tray: Thin, Plain, Recycled, Thick, Colour, Bond, Envelope Paper Cassette: Thin, Plain, Recycled, Thick, Colour, Label, Bond	<b>Type</b>	Standard: Colour Platen and Single-pass Duplexing Automatic Document Feeder* [2-sided to 2-sided (Automatic with DADF)] * Detect Feeder Multi Sheet Feed is supported.
<b>Supported media sizes</b>	Multi-purpose tray: Standard size: A4, A5, A5R, A6, B5, Envelopes [No.10 (COM10), Monarch, ISO-C5, DL] Custom size: 76.0 x 127.0 mm to 215.9 x 355.6 mm Paper Cassette: Standard size: A4, A5, A5R, A6, B5 Custom Size: 101.6 x 148.0 mm to 215.9 x 355.6 mm	<b>Document Feeder Paper Capacity (80 gsm)</b>	100 Sheets
<b>Supported media weights</b>	Multi-purpose tray: 60 to 216 gsm Paper Cassette: 60 to 163 gsm Duplex: 60 to 163 gsm	<b>Acceptable Originals and weights</b>	Platen: Sheet, Book, 3-Dimensional Objects (Height: Up to 30 mm, Weight: up to 2kg) Document Feeder media weight: 1-sided scanning: 42 to 128 gsm (BW)*, 64 to 128 gsm (CL) 2-sided scanning: 50 to 128 gsm (BW)*, 64 to 128 gsm (CL) * A6: 52 to 128 gsm (BW)
<b>Warm-up Time</b>	From Power On: 10 seconds or less* * Time from device power-on, until copy ready (not print reservation) From Sleep Mode: 10 seconds or Less Quick Startup Mode: 4 seconds or less* * Time from device power-on to when key operation can be performed on the touch panel display.	<b>Supported media sizes</b>	Platen: max. scanning size: 216.0 x 355.6 mm Document Feeder media size: A4, A5, A6, B5, Custom size: 105.0 x 148 mm to 216.0 x 355.6 mm
<b>Dimensions (W x D x H)</b>	Standard model: 521 x 645 x 668 mm Finisher model: 521 x 645 x 864 mm When the optional Paper Feeding Unit is attached: Standard model: 642 x 668 x 1124 mm Finisher model: 642 x 668 x 1,320 mm	<b>Scan Speed (ipm; BW and CL, A4)</b>	1-sided Scanning: 50 (300 x 300 dpi, send), 50 (300 x 600 dpi, copy)*, 30 (600 x 600 dpi, copy) 2-sided Scanning: 100 (300 x 300 dpi, send), 100 (300 x 600 dpi, copy)*, 50 (600 x 600 dpi, copy)
<b>Installation Space(W x D)</b>	950 x 840 mm (with left cartridge door open + right door open + the cassette drawer open)	<b>Scan Resolution (dpi)</b>	600 x 600, 400 x 400, 300 x 300, 200 x 400, 200 x 200, 200 x 100, 150 x 150, 100 x 100
<b>Weight (Including toner)</b>	Standard model: Approx. 46 kg Finisher model: Approx. 55 kg	<b>Pull Scan Specifications</b>	Colour Network ScanGear2. For both TWAIN and WIA Supported OS: Windows 7 / 8.1 / 10 / Server 2008 / Server 2008 R2 / Server 2012 / Server 2012 R2 / Server 2016
<b>PRINT SPECIFICATIONS</b>		<b>Scan Method</b>	Send functionality available on all models Scan to USB Memory: Available on all models Scan to Mobile Devices and cloud-based services: A range of solutions is available to provide scanning to mobile devices or cloud-based services depending on your requirements. Please contact your sales representative for further information. TWAIN/WIA Pull scanning available on all models
<b>Print Speed*</b> (ppm; BW and CL) * Simplex	iR-ADV C475i III / C475iZ III up to 47 (A4), up to 73 (A5), up to 39 (A5R), up to 49 (A6)	<b>SEND SPECIFICATIONS</b>	
<b>Print Resolution* (dpi)</b>	600 x600, 1200 x1200	<b>Destination</b>	Standard: E-mail/Internet FAX (SMTP), SMB v3.0, FTP, WebDAV, Mail Box, Optional: Super G3 FAX, IP Fax
<b>Page description languages</b>	Standard: UFR II, PCL* 6, Genuine Adobe® PostScript® Level 3 Available from USB memory, Advanced space, Remote UI and Web Access* Supported file types: TIFF, JPEG, PDF, EPS, and XPS *Only PDF print from websites is supported	<b>Address Book</b>	LDAP (2,000)/Local (1,600)/Speed dial (200)
<b>Direct Print</b>		<b>Send resolution (dpi)</b>	600 x 600, 400 x 400, 300 x 300, 200 x 400, 200 x 200, 200 x 100, 150 x 150, 100 x 100
<b>Printing from mobile and cloud</b>	A range of software and MEAP-based solutions are available to provide printing from mobile devices or internet-connected devices and cloud-based services depending on your requirements. Please contact your sales representative for further information.	<b>Communication protocol</b>	File: FTP (TCP/IP), SMB v3.0, WebDAV E-mail/I-Fax: SMTP, POP3
<b>Fonts</b>	PCL fonts: 93 Roman, 10 Bitmap fonts, 2 OCR fonts, Andale Mono WT J/K/S/T*1 (Japanese, Korean, Simplified and Traditional Chinese), Barcode fonts*2 PS fonts: 136 Roman *1 Requires optional PCL International Font Set-A1 *2 Requires optional Barcode Printing Kit-D1	<b>File Format</b>	Standard: TIFF, JPEG, PDF (Compact, Searchable, Apply policy, Optimize for Web, PDF A/1-b, Encrypted, Device Signature), XPS (Compact, Searchable, Device Signature), Office Open XML (PowerPoint, Word) Optional: PDF (Trace & Smooth, User Signature), XPS(User Signature)
<b>Print Features</b>	Suspend Job Timeout, Profile Settings, Secured Print, Encrypted Secure Print, Watermark, Header/Footer, Page Layout, Two-sided Printing, Collating, Booklet Printing, Grouping, Offsetting, Toner Reduction, Poster Printing, Forced Hold Printing	<b>Universal Send Features</b>	Original Type Selection, Two-sided Original, Density Adjustment, Sharpness, Erase Frame, Job Build, Sender's Name (TTI), Delayed Send, Preview, Job Done Notice, File Report, Original Content Orientation, Skip Blank Pages, Detect Feeder Multi Sheet Feed
<b>Operating System</b>	UFR II: Windows® 7 / 8.1 / 10 / Server 2008 / 2008 R2 / 2012 / 2012 R2 / 2016, MAC OS X (10.9 or later) PCL: Windows® 7 / 8.1 / 10 / Server 2008 / 2008 R2 / 2012 / 2012 R2 / Server 2016 PS: Windows® 7 / 8.1 / 10 / Server 2008 / 2008 R2 / 2012 / 2012 R2 / 2016, MAC OS X (10.9 or later) PPD: MAC OS X (10.3.9 or later), Windows® 7 / 8.1 / 10 SAP Device Types are available via the SAP Market Place. Please refer to <a href="http://www.canon-europe.com/support/business-product-support">http://www.canon-europe.com/support/business-product-support</a> for availability of print solutions for other operating systems and environments including AS/400, UNIX, Linux and Citrix. Some of these solutions are chargeable.	<b>FAX SPECIFICATIONS</b>	
		<b>Maximum Number of Connection Lines</b>	1
		<b>Modem Speed</b>	Super G3: 33.6 kbps G3: 14.4 kbps
		<b>Compression Method</b>	MH, MR, MMR, JBIG
		<b>Resolution (dpi)</b>	400 x 400, 200 x 400, 200 x 200, 200 x 100
		<b>Sending/Recording Size</b>	A4, A5*, A6* and B5* / A4, A5, B5 *Sent as A4
		<b>FAX memory</b>	Up to 30,000 pages
		<b>Speed dials</b>	Max. 200

# TECHNICAL SPECIFICATIONS

# imageRUNNER ADVANCE C475i III series

<b>Group dials/destinations</b>	Max. 199 dials	<b>CONSUMABLES</b>	
<b>Sequential broadcast</b>	Max. 256 addresses	<b>Toner Cartridges</b>	TONER T04 BK/C/M/Y
<b>Memory backup</b>	Yes	<b>Toner Yield</b>	TONER T04 BK: 33,000 pages* TONER T04 C/M/Y: 27,500 pages* *Toner Cartridge yield in accordance with ISO/IEC 19798.
<b>Fax Features</b>	Original Type Selection, Two-sided Original, Density (for Scanning), Sharpness, Erase Frame, Job Build, Sender's Name (TTI), Selecting the Telephone Line, Direct Send, Delayed Send, Preview, Job Done Notice, TX Report, Detect Feeder Multi Sheet Feed	<b>SOFTWARE AND PRINTER MANAGEMENT</b>	
<b>STORE SPECIFICATIONS</b>		<b>Tracking and reporting</b>	<b>Universal Login Manager (ULM):</b> Manage your costs easily by using the embedded reporting capability to identify and control costs on a user-based level by device, uniFLOW Online Express: Combining with ULM you can gain further control and highlight expenditures per users/department and pinpoint where costs can be scaled down from a central cloud based location.
<b>Mail Box (Number supported)</b>	100 User Inboxes, 1 Memory RX Inbox, 50 Confidential Fax Inboxes, 30,000 Maximum Pages Stored	<b>Remote management tools</b>	<b>iW Management Console:</b> Server-based software for centralised management of a fleet of devices (includes monitoring or consumables, status monitoring and alerts, distribution of address books, configuration settings, firmware and MEAP applications, meter capture and reporting, driver and resource management) <b>eMaintenance:</b> Compatible with eMaintenance services via embedded RDS (Enables meter capture, automatic consumables management, remote diagnostics and reporting for service providers to offer efficient, fast and proactive maintenance) <b>Content Delivery System:</b> Allows the Remote distribution of firmware, iR options and MEAP applications; Remote User Interface (RUI) Web based interface to each device that helps to provide remote device management and control
<b>Advanced Space</b>	Communication Protocol: SMB or WebDAV Supported Client PC: Windows (Windows 7 / 8.1 / 10) Concurrent Connections (Max.): SMB: 64, WebDAV: 3 (Active Sessions)	<b>Scanning software</b>	<b>Network ScanGear:</b> TWAIN-compliant scanner driver that enables computers on a network to use the pull scan functionality of the device
<b>Advanced Space available disc space</b>	Approx. 16GB (Standard HDD)	<b>Optimisation tools</b>	<b>Canon Driver Configuration Tool:</b> A utility for changing the factory default settings of Canon print drivers <b>NetSpot Device Installer:</b> Simple utility software that allows you to make network protocol settings for Canon devices connected to your network.
<b>Advanced Space Features:</b>	Authentication for Advanced Space Log-in, Sort Function, Printing a PDF File with a Password, imageWARE Secure Audit Manager Support	<b>Platform</b>	<b>MEAP (Multifunctional Embedded Application Platform):</b> A powerful JAVA Embedded Platform for Canon devices which provides tight coupling between a range of software solutions and the device. MEAP Web: Web service alternative to MEAP that allows MFP applications to be developed and deployed via web services
<b>Memory Media</b>	Standard: USB Memory	<b>Document Publishing</b>	<b>IW DESKTOP:</b> Powerful print publishing software which easily combines documents from different sources and file formats, applies finishing with preview and templates to create professional looking documents. Includes PDF creation, annotation and compression capabilities for simple digital workflows such as proofing and authorisation
<b>SECURITY SPECIFICATIONS</b>		<b>PAPER SUPPLY OPTIONS</b>	
<b>Authentication</b>	Standard: Universal Login Manager* (Device and Function Level Log-in), uniFLOW Online Express**, User Authentication, Department ID Authentication, Access Management System Optional: My Print Anywhere secure print (Requires uniFLOW) * Installation, activation and registration required ** No charge for this solution; however activation is required.	<b>Cassette Feeding Unit-AS1</b>	Paper Capacity: 500 sheets (80 gsm) Paper Type: Thin, Plain, Recycled, Thick, Colour, Labels, Bond Paper Size: A4, A5, A5R, A6, B5, Custom size: 101.6 x 148.0 mm to 215.9 x 355.6 mm Paper Weight: 60 to 163 gsm Power Source: From the Main Unit Dimensions (W x D x H): 642 x 657 x 456 mm (attached to the main unit) Weight: Approx. 19 kg
<b>Data</b>	<b>Standard:</b> Trusted Platform Module (TPM), Hard Disk Password Lock, Hard Disk Drive Erase, Mail Box Password Protection, Hard Disk Drive Encryption(FIPS140-2 Validated), Common Criteria Certification (DIN ISO 15408) <b>Optional:</b> Data Loss Prevention (Requires uniFLOW)	<b>Cassette Feeding Unit-AT1</b>	Paper Capacity: 500 sheets x 3 (80 gsm) Paper Type: Thin, Plain, Recycled, Thick, Colour, Labels, Bond Paper Size: A4, A5, A5R, A6, B5, Custom size: 101.6 x 148.0 mm to 215.9 x 355.6 mm Paper Weight: 60 to 163 gsm Power Source: From the Main Unit Dimensions (W x D x H): 642 x 657 x 456 mm (attached to the main unit) Weight: Approx. 24 kg
<b>Network</b>	<b>Standard:</b> IP/Mac Address Filtering, IPSEC, TLS Encrypted Communication, SNMP V3.0, IEEE 802.1X, IPv6, SMTP Authentication, POP Authentication before SMTP, S/MIME	<b>Cassette Module-AJ</b>	Paper Capacity: 500 sheets (80 gsm) Paper Type: Thin, Plain, Recycled, Thick, Colour, Labels, Bond Paper Size: A4, A5, A5R, A6, B5, Custom size: 101.6 x 148.0 mm to 215.9 x 355.6 mm Paper Weight: 60 to 163 gsm Power Source: From the Main Unit Dimensions (W x D x H): 521 x 474 x 130 mm (attached to the main unit) Weight: Approx. 7 kg
<b>Document</b>	Standard: Secure Print, Adobe LiveCycle® Rights Management ES2.5 Integration, Encrypted PDF, Encrypted Secure Print, Device signature, Secure Watermarks Optional: User signature		
<b>ENVIRONMENTAL SPECIFICATIONS</b>			
<b>Operating Environment</b>	Temperature: 10 to 30 °C Humidity: 20 to 80 % RH (Relative Humidity)		
<b>Power source</b>	220-240 V, 50/60 Hz, 4.3 A		
<b>Plug (Main Unit)</b>	CEE 7/7 (230V)		
<b>Power consumption</b>	Maximum: Approx. 1,500 W Copying with ADF: Approx. 739 W* Standby: Approx. 49.9 W* Sleep mode: Approx. 1.0 W Plug-in Off: Approx. 0.4 W Typical Electricity Consumption (TEC) rating** 1.8 kWh * Reference value (measured one unit) ** As per USA Energy Star 2.0		
<b>Noise levels</b>	<b>Sound Power Level (LwAd)</b> Active: 73.3 db or Less <sup>1</sup> Standby: iR-ADV C475i III: 4.5 B <sup>2</sup> , iR-ADV C475iZ III: 4.3 B <sup>2</sup> <b>Sound Pressure (LpAm)</b> Bystander's position <sup>2</sup> : Active(BW): iR-ADV C475i III: 50 db (1-sided), 52 db (2-sided) iR-ADV C475iZ III: 50 db (1-sided), 53 db (2-sided) Active(CL): iR-ADV C475i III: 51 db (1-sided), 53 db (2-sided) iR-ADV C475iZ III: 51 db (1-sided), 54 db (2-sided) Standby <sup>2</sup> : iR-ADV C475i III: 28 db, iR-ADV C475iZ III: 27 db <sup>1</sup> DE-UZ205 (2017) compliant (*Data taken from Blue Angel Standard value) <sup>2</sup> Reference value: measured only one unit with ISO7779, described with ISO9296 (1998)		
<b>Standards</b>	Blue Angel		

# TECHNICAL SPECIFICATIONS

# imageRUNNER ADVANCE C475i III series

## OUTPUT FEATURES

Finisher Model (IR-ADV C475iZ III)

Number of Inner Trays: 2  
 Upper Tray Capacity\*: A4, A5, B5, Custom size (148.0 x 210.0 mm to 215.9 x 355.6 mm): 400 sheets  
 Lower Tray Capacity\*: A4, A5, B5, Custom size (148.0 x 210.0 mm to 215.9 x 355.6 mm): 100 sheets  
 Main unit output tray\*: 400 sheets \* 80 gsm  
 Paper Type: Thin, Plain, Recycled, Thick, Colour, Bond  
 Staple Paper Weight: 60 to 120 gsm (available with upper tray)  
 Staple Position: Corner  
 Staple Paper Size: A4, Custom size (210.0 x 279.4 mm to 215.9 x 355.6 mm)  
 Staple Capacity: 30 sheets (60 to 90 gsm), 20 sheets (91 to 120 gsm)

## HARDWARE ACCESSORIES

### Card Readers

MICARDPLUS FOR ULM - A proximity card reader for card based user authentication, supporting multiple card technologies (HID, HiTag, Casi Rusco, Indala and MiFare etc.). Integrates with Universal Login Manager and uniFLOW  
 COPY CARD READER-F1 - Magnetic physical card access system. (Integrates with Department ID, not for use with uniFLOW)  
 COPY CARD READER ATTACHMENT-B5 - Attachment kit for Copy Card Reader-F1 only.

## SYSTEM AND CONTROLLER OPTIONS

### Print Accessories

PCL INTERNATIONAL FONT SET-A1 - Adds PCL support for Andale Mono WT J/K/S/T (Japanese/Korean/Simplified Chinese/Traditional Chinese).

## Send Options

UNIVERSAL SEND TRACE & SMOOTH PDF KIT-A1 - Enables the device to create and send Trace and Smooth PDF

UNIVERSAL SEND DIGITAL USER SIGNATURE KIT-C1 - Ensures the authenticity of a PDF/XPS by identifying the user that sent the document through a visible and/or invisible digital signature.

## Barcode Printing

BARCODE PRINTING KIT-D1 - Provides the ability to print 1D and 2D barcodes on output using jet caps technology.

## System Accessories

COPY CONTROL INTERFACE KIT-A1: Allows connection (CCVI I/F) between 3rd party copy control terminal and Canon's IR-ADV range for cost recovery use.

CONNECTION KIT - A1 for BLUETOOTH LE - Bluetooth chip is an option for enabling the communication between main unit and other devices using Bluetooth

NFC Kit-C1 - NFC Control Panel is optional kit enabling the communication between main unit and other devices using NFC. For Flat panel

## Fax Accessories

SUPER G3 FAX BOARD-AT1 - Adds fax functionality.

REMOTE FAX KIT-A1 - Enables the device to send and receive fax from another device connected with a fax board.

IP FAX EXPANSION KIT-B1 - (Requires Super G3 FAX Board-AT1) Enables users to send and receive Fax documents via IP Fax network

## OTHER OPTIONS

### Accessibility Accessories

ADF ACCESS HANDLE-A1 - Attaches to the document feeder, making access easier for seated users.

### Staple Cartridge

STAPLE-P1 - For stapling (5,000 pcs x 2)

For a complete list of all hardware accessories, please refer to our website specifications page or online product configurator.

## Software & Solutions



## Certifications and compatibility



**Canon Ireland**  
 3006 Lake Drive  
 Citywest, Saggart  
 Co. Dublin, Ireland  
 Telephone No: 01 2052400  
 Facsimile No: 01 2052525  
 canon.ie

**Canon (UK) Ltd**  
 Woodhatch  
 Reigate  
 Surrey RH2 8BF  
 Telephone No: 01737 220000  
 Facsimile No: 01737 220022  
 canon.co.uk

**Canon Inc.**  
 canon.com  
**Canon Europe**  
 canon-europe.com  
 English edition  
 © Canon Europa N.V., 2019